

6759 Supply Way
 Boise, ID. 83716
 Phone# 208-345-3844
 Fax # 208-345-3790



Committed to Our Customers

5 Campbell Drive S.E.
 Hermiston, Or. 97838
 Toll Free 877-385-3125
 Phone# 541-564-7636
 Fax # 541-564-6522

Web Site: www.a1indsupply.com



INDUSTRIAL CHOICE



Kuriyama-Couplings™



Camlocks Import and Domestic!

Camlocks: Aluminum-SS316-Brass-PolyPropylene, D-Iron
Reference Catalog 4-15-22

Contents: Aluminum Camlocks Pg's 2-6, SS316 7-9, Brass 9-10, PP 11-12, DI 12, Accessories 13-14

Industrial Choice and Entire have teamed up to offer The Best Import Camlocks Available!



Extra material around handle pin!
Groove for Crimp ferrules!

Investment Cast SS handle!
More barbs for better sealing!

Kuriyama-Couplings™

PT the Gold Standard for USA Camlocks for 60yrs





INDUSTRIAL CHOICE






Aluminum Camlocks are Tough here is why!







Made from 356 Aluminum Heat treated to T6, on State of the Art Casting Machines, it's thickness matches the best!
 No fillers or Recycled Aluminum like other imports!



**Extra material around handle pin!
 Groove for Crimp ferrules!**

**Investment Cast SS handle!
 More barbs for better sealing!**







Male Camlock x FNPT Aluminum		Male Camlock x Hose barb Aluminum	
1/2-A-AL		1/2-E-AL	
3/4-A-AL		3/4-E-AL	
1-A-AL		1-E-AL	
1.25-A-AL		1.25-E-AL	
1.5-A-AL		1.5-E-AL	
2-A-AL		2-E-AL	
2.5-A-AL		2.5-E-AL	
3-A-AL		3-E-AL	
4-A-AL		4-E-AL	
5-A-AL		5-E-AL	
6-A-AL		6-E-AL	
8-A-AL-87/8		8-E-AL-87/8	
10-A-AL	10-E-AL		
12-A-AL	12-E-AL		
			
Female Camlock x MNPT Aluminum		Male Camlock x MNPT Aluminum	
1/2-B-AL		1/2-F-AL	
3/4-B-AL		3/4-F-AL	
1-B-AL		1-F-AL	
1.25-B-AL		1.25-F-AL	
1.5-B-AL		1.5-F-AL	
2-B-AL		2-F-AL	
2.5-B-AL		2.5-F-AL	
3-B-AL		3-F-AL	
4-B-AL		4-F-AL	
5-B-AL		5-F-AL	
6-B-AL		6-F-AL	
8-B-AL		8-F-AL-87/8	
10-B-AL	10-F-AL		
12-B-AL	12-F-AL		

Female Camlock x Hose barb Alum.		Female Camlock Dust Cap Aluminum	
1/2-C-AL		1/2-DC-AL	
3/4-C-AL		3/4-DC-AL	
1-C-AL		1-DC-AL	
1.25-C-AL		1.25-DC-AL	
1.5-C-AL		1.5-DC-AL	
2-C-AL		2-DC-AL	
2.5-C-AL		2.5-DC-AL	
3-C-AL		3-DC-AL	
4-C-AL		4-DC-AL	
5-C-AL		5-DC-AL	
6-C-AL		6-DC-AL	
8-C-AL-87/8		8-DC-AL-87/8	
10-C-AL		10-DC-AL	
12-C-AL	12-DC-AL		
Female Camlock x FNPT Aluminum		Male Camlock Dust Plug Aluminum	
1/2-D-AL		1/2-DP-AL	
3/4-D-AL		3/4-DP-AL	
1-D-AL		1-DP-AL	
1.25-D-AL		1.25-DP-AL	
1.5-D-AL		1.5-DP-AL	
2-D-AL		2-DP-AL	
2.5-D-AL		2.5-DP-AL	
3-D-AL		3-DP-AL	
4-D-AL		4-DP-AL	
5-D-AL		5-DP-AL	
6-D-AL		6-DP-AL	
8-D-AL-87/8"		8-DP-AL-87/8"	
10-D-AL		10-DP-AL	
12-D-AL	12-DP-AL		
<u>Special Application Camlocks: Flange adapters-Jump size-Spool Adapters-Elbow Cams AL</u>			
Flange x Male Camlock Alum.356 T6		Flange x Male Camlock Alum. 356 T6	
2-AFL-AL-F		2-DFL-AL-F	
2.5-AFL-AL-F		2.5-DFL-AL-F	
3-AFL-AL		3-DFL-AL	
4-AFL-AL		4-DFL-AL	
6-AFL-AL		6-DFL-AL	
8-AFL-AL		8-DFL-AL	
8010-AFL-AL		8010-DFL-AL	
10-AFL-AL-F		10-DFL-AL-F	
12-AFL-AL-F		12-DFL-AL-F	

Male Camlock x Socket Weld Pipe Alum			Female Camlock x Socket Weld Pipe Alum		
1.5-A-SWP-AL			1.5-D-SWP-AL		
2-A-SWP-AL			2-D-SWP-AL		
2.5-A-SWP-AL			2.5-D-SWP-AL		
3-A-SWP-AL			3-D-SWP-AL		
4-A-SWP-AL			4-D-SWP-AL		
5-A-SWP-AL			5-D-SWP-AL		
6-A-SWP-AL			6-D-SWP-AL		
Male Camlock x Socket Weld Tube Alum			Female Camlock x Socket Weld Tube Alum		
4-A-SWT-AL			4-D-SWT-AL		
6-A-SWT-AL			6-D-SWT-AL		
8-A-SWT-AL			8-D-SWT-AL		
Male Cam x Butt weld/socket tube AL			Female Cam x Butt weld/socket tube AL		
1.5-A-BW-SWT-AL			1.5-B-BW-SWT-AL		
2-A-BW-SWT-AL			2-B-BW-SWT-AL		
2.5-A-BW-SWT-AL			2.5-B-BW-SWT-AL		
3-A-BW-SWT-AL			3-B-BW-SWT-AL		
4-A-BW-SWT-AL			4-B-BW-SWT-AL		
5-A-BW-SWT-AL			5-B-BW-SWT-AL		
6-A-BW-SWT-AL			6-B-BW-SWT-AL		
8-A-BW-SWT-AL			8-B-BW-SWT-AL		
Male Cam x FPT jump sizes Aluminum			Female Camlock x FPT jump sizes Alum		
7550-A-L			1510-D-AL		
1520-A-AL			2015-D-AL		
2015-A-AL			3020-D-AL		
2030-A-AL			3025-D-AL		
2520-A-AL			4030-D-AL		
2530-A-AL			6040-D-AL		
3020-A-AL			Female x Male Camlock Jump Sizes Alum		
3025-A-AL			1510-DA-AL		
3040-A-AL			2015-DA-AL		
4030-A-AL			2030-DA-AL		
4050-A-AL			2040-DA-AL		
6040-A-AL		3015-DA-AL			
		3020-DA-AL			
		3040-DA-AL			
Spool Adapters Male x Male Camlock Alum			4020-DA-AL		
1-AA-AL			4030-DA-AL		
1.25-AA-AL			4050-DA-AL		
1.5-AA-AL			4060-DA-AL		
2-AA-AL			5040-DA-AL		
2015-AA-AL			5060-DA-AL		
3-AA-AL			6030-DA-AL		
3020-AA-AL			6040-DA-AL		
4-AA-AL			6050-DA-AL		
4020-AA-AL			8060-DA-AL		
4030-AA-AL					
5-AA-AL					

5040-AA-AL			Female x Male Camlock Elbow Jump Sizes Alum	
6-AA-AL			150-DA-90-AL	
6040-AA-AL			200-DA-90-AL	
6050-AA-AL			300-DA-90-AL	
8-AA-AL			400-DA-90-AL	
			600-DA-90-AL	
Female Camlock x MPT jump sizes Alum				
2015-B-AL			400-DA-45-AL	
2025-B-AL			800-DA-45-AL	
2030-B-AL		Male Camlock x Hose barb jump sizes AL		
2520-B-AL			2015-E-AL	
2530-B-AL			3020-E-AL	
3020-B-AL			3025-E-AL	
3025-B-AL			3040-E-AL	
3040-B-AL			4030-E-AL	
4030-B-AL		Male Camlock x MPT jump sizes Alum		
Female Camlock x Hose barb Aluminum				
1520-C-AL			7550-F-AL	
2015-C-AL			2015-F-AL	
2025-C-AL			2030-F-AL	
3020-C-AL			3015-F-AL	
3025-C-AL			3020-F-AL	
3040-C-AL			3025-F-AL	
4030-C-AL			3040-F-AL	
			4030-F-AL	
Female x Female Camlock Aluminum			5040-F-AL	
1-CC-AL			Female Camlock 90deg x Hose barb AL	
1.5-CC-AL			125-C-90-AL	
2-CC-AL			1.5-C-90-AL	
3-CC-AL			2-C-90-AL	
3020-CC-AL			3-C-90-AL	
4-CC-AL			4-C-90-AL	
4030-CC-AL			6-C-90-AL	
5040-CC-AL			Dry Break Flush Face Valved Cam Aluminum	
5-CC-AL				
6-CC-AL				
6040-CC-AL				
Dry Break Flush Face Valved Cam Aluminum				
			Dry Breaks Alum Flush Face Camlocks/ Valve PT brand	
			MD15A-AL-VITON	1 1/2" A AL W/Viton
			MD15D-AL-VITON	1 1/2" D-valved AL W/Viton
			MD20A-AL-VITON	2" A AL W/Viton
			MD20D-AL-VITON	2" D-valved AL W/Viton
MD15D-AL-Buna/Nitril	1 1/2" D-valved AL W/Viton	MD20D-AL-VITON	2" D-valved AL W/Viton	
MD20D-AL-Buna/Nitril	2" D-valved AL W/Viton	MD30A-AL-VITON	3" A AL W/Viton	
MD30D-AL-Buna/Nitril	3" D-valved AL W/Viton	MD30D-AL-VITON	3" D-valved AL W/Viton	

PT-Domestic Aluminum Camlocks Brass handles for Rough service

Male Camlock x FNPT Aluminum		Female Camlock x FNPT Aluminum	
3/4-A-AL-USA		3/4-D-AL-USA	
1-A-AL-USA		1-D-AL-USA	
1.25-A-AL-USA		1.25-D-AL-USA	
1.5-A-AL-USA		1.5-D-AL-USA	
2-A-AL-USA		2-D-AL-USA	
2.5-A-AL-USA		2.5-D-AL-USA	
3-A-AL-USA		3-D-AL-USA	
4-A-AL-USA		4-D-AL-USA	
5-A-AL-USA	5-D-AL-USA		
6-A-AL-USA	6-D-AL-USA		
8-A-AL-USA	8-D-AL-USA		
Female Camlock x MNPT Aluminum		Male Camlock x Hose barb Aluminum	
3/4-B-AL-USA		3/4-E-AL-USA	
1-B-AL-USA		1-E-AL-USA	
1.25-B-AL-USA		1.25-E-AL-USA	
1.5-B-AL-USA		1.5-E-AL-USA	
2-B-AL-USA		2-E-AL-USA	
2 1/2-B-AL-USA		2.5-E-AL-USA	
3-B-AL-USA		3-E-AL-USA	
4-B-AL-USA		4-E-AL-USA	
5-B-AL-USA	5-E-AL-USA		
6-B-AL-USA	6-E-AL-USA		
8-C-AL-USA	8-E-AL-USA		
Female Camlock x Hose barb Alum.		Male Camlock x MNPT Aluminum	
3/4-C-AL-USA		3/4-F-AL-USA	
1-C-AL-USA		1-F-AL-USA	
1.25-C-AL-USA		1.25-F-AL-USA	
1.5-C-AL-USA		1.5-F-AL-USA	
2-C-AL-USA		2-F-AL-USA	
2.5-C-AL-USA		2.5-F-AL-USA	
3-C-AL-USA		3-F-AL-USA	
4-C-AL-USA		4-F-AL-USA	
5-C-AL-USA	5-F-AL-USA		
6-C-AL-USA	6-F-AL-USA		
8-C-AL-USA	8-F-AL-USA		



INDUSTRIAL CHOICE

Industrial Choice & Entire teamed up on All SS316 Investment Cast Stainless Steel Camlocks are tough with the Features you need!




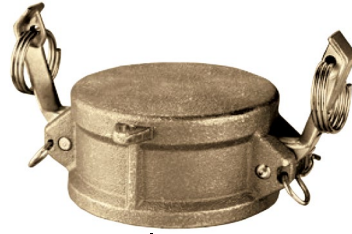




All Stainless Steel Camlocks 316

Male Camlock x FNPT SS316		Male Camlock x Hose barb SS316	
50-A-SS		50-E-SS	
75-A-SS		75-E-SS	
100-A-SS		100-E-SS	
125-A-SS		125-E-SS	
150-A-SS		150-E-SS	
200-A-SS		200-E-SS	
250-A-SS		250-E-SS	
300-A-SS		300-E-SS	
400-A-SS		400-E-SS	
500-A-SS		500-E-SS	
600-A-SS		600-E-SS	
Female Camlock x MNPT SS316		Male Camlock x MNPT SS316	
50-B-SS		50-F-SS	
75-B-SS		75-F-SS	
100-B-SS		100-F-SS	
125-B-SS		125-F-SS	
150-B-SS		150-F-SS	
200-B-SS		200-F-SS	
250-B-SS		250-F-SS	
300-B-SS		300-F-SS	
400-B-SS		400-F-SS	
500-B-SS		500-F-SS	
600-B-SS		600-F-SS	

Female Camlock x Hose barb SS316		Female Camlock x FNPT SS316	
50-C-SS		50-DC-SS	
75-C-SS		75-DC-SS	
100-C-SS		100-DC-SS	
125-C-SS		125-DC-SS	
150-C-SS		150-DC-SS	
200-C-SS		200-DC-SS	
250-C-SS		250-DC-SS	
300-C-SS		300-DC-SS	
400-C-SS		400-DC-SS	
500-C-SS		500-DC-SS	
600-C-SS	600-DC-SS		
Female Camlock x FNPT SS316		Male Camlock Dust Plug SS316	
50-D-SS		50-DP-SS	
75-D-SS		75-DP-SS	
100-D-SS		100-DP-SS	
125-D-SS		125-DP-SS	
150-D-SS		150-DP-SS	
200-D-SS		200-DP-SS	
250-D-SS		250-DP-SS	
300-D-SS		300-DP-SS	
400-D-SS		400-DP-SS	
500-D-SS		500-DP-SS	
600-D-SS	600-DP-SS		
Special Application Camlocks: Flange adapters-Jump size-Spool Adapters-Elbow Cams SS6			
Flange x Male Camlock SS304 Fab-Tig		Flange x Male Camlock SS304 Fab-Tig	
200-AFL-S4-F		200-DFL-S4-F	
250-AFL-S4-F		250-DFL-S4-F	
300-AFL-S4-F		300-DFL-S4-F	
400-AFL-S4-F		400-DFL-S4-F	
600-AFL-S4-F		600-DFL-S4-F	
Flange x Male Camlock SS316 Fab-Tig		Flange x Male Camlock SS316-Fab-Tig	
200-AFL-S6-F		200-DFL-S6-F	
250-AFL-S6-F		250-DFL-S6-F	
300-AFL-S6-F		300-DFL-S6-F	
400-AFL-S6-F		400-DFL-S6-F	
600-AFL-S6-F		600-DFL-S6-F	
Male Camlock x Socket Weld Pipe SS316		Female Camlock x Socket Weld Pipe SS316	
150-A-SWP-SS		150-D-SWP-SS	
200-A-SWP-SS		200-D-SWP-SS	
250-A-SWP-SS		250-D-SWP-SS	
300-A-SWP-SS		300-D-SWP-SS	
400-A-SWP-SS		400-D-SWP-SS	
500-A-SWP-SS		500-D-SWP-SS	
600-A-SWP-SS	600-D-SWP-SS		

Male Cam x Butt weld/socket tube SS316		Female Cam x Butt weld/socket tube SS316	
150-F-BW-SWT-SS		150-B-BW-SWT-SS	
200-F-BW-SWT-SS		200-B-BW-SWT-SS	
250-F-BW-SWT-SS		250-B-BW-SWT-SS	
300-F-BW-SWT-SS		300-B-BW-SWT-SS	
400-F-BW-SWT-SS		400-B-BW-SWT-SS	
500-F-BW-SWT-SS		500-B-BW-SWT-SS	
600-F-BW-SWT-SS		600-B-BW-SWT-SS	
Spool Adapters Male x Male Camlock SS316		Spool Adapters Female x Female Cam SS316	
150-AA-SS		150-CC-SS	
2015-AA-SS		200-CC-SS	
200-AA-SS		300-CC-SS	
3020-AA-SS		400-C-SS	
300-AA-SS		Female x Male Camlock Jump Sizes SS316	
4030-AA-SS		2030-DA-SS	
400-AA-SS		3020-DA-SS	
	4030-DA-SS		
Dry Break Flush Face Valved Camlocks SS316		6040-DA-SS	
		Female Cam 90deg x Hose Barb SS316	
		100-C-90-SS	
		150-C-90-SS	
		200-C-90-SS	
		300-C-90-SS	
		400-C-90-SS	
		600-C-90-SS	
Dry Breaks SS Flush Face Camlocks/ Valve PT brand			
MD15A-SS-VITON	1 1/2" A SS W/Viton		
MD15D-SS-VITON	1 1/2" D-valved SS W/Viton		
MD20A-SS-VITON	2" A SS W/Viton		
MD20D-SS-VITON	2" D-valved SS W/Viton		
MD30A-SS-VITON	3" A SS W/Viton		
MD30D-SS-VITON	3" D-valved SS W/Viton		
All Brass Camlocks			
Male Camlock x FNPT Brass		Male Camlock x Hose barb Brass	
50-A-BR		50-E-BR	
75-A-BR		75-E-BR	
100-A-BR		100-E-BR	
125-A-BR		125-E-BR	
150-A-BR		150-E-BR	
200-A-BR		200-E-BR	
250-A-BR		250-E-BR	
300-A-BR		300-E-BR	
400-A-BR		400-E-BR	
500-A-BR		500-E-BR	
600-A-BR	600-E-BR		

Female Camlock x MNPT Brass		Male Camlock x MNPT Brass	
50-B-BR		50-F-BR	
75-B-BR		75-F-BR	
100-B-BR		100-F-BR	
125-B-BR		125-F-BR	
150-B-BR		150-F-BR	
200-B-BR		200-F-BR	
250-B-BR		250-F-BR	
300-B-BR		300-F-BR	
400-B-BR		400-F-BR	
500-B-BR		500-F-BR	
600-B-BR	600-F-BR		
Female Camlock x Hose barb Brass		Female Camlock x FNPT Brass	
50-C-BR		50-DC-BR	
75-C-BR		75-DC-BR	
100-C-BR		100-DC-BR	
125-C-BR		125-DC-BR	
150-C-BR		150-DC-BR	
200-C-BR		200-DC-BR	
250-C-BR		250-DC-BR	
300-C-BR		300-DC-BR	
400-C-BR		400-DC-BR	
500-C-BR		500-DC-BR	
600-C-BR	600-DC-BR		
Female Camlock x FNPT Brass		Male Camlock Dust Plug Brass	
50-D-BR		50-DP-BR	
75-D-BR		75-DP-BR	
100-D-BR		100-DP-BR	
125-D-BR		125-DP-BR	
150-D-BR		150-DP-BR	
200-D-BR		200-DP-BR	
250-D-BR		250-DP-BR	
300-D-BR		300-DP-BR	
400-D-BR		400-DP-BR	
500-D-BR		500-DP-BR	
600-D-BR	600-DP-BR		







INDUSTRIAL CHOICE

Industrial Choice & Entire teamed up on PolyPropylene Camlocks to offer a high Quality PP Camlock. Rivalling the Best! Providing Deliverance from the High Price of those Banjo folks!




Male Camlock x FPT Hvy D.Polypropylene		Male Camlock x Hose barb HD Polyprop	
50-A-PP		50-E-PP	
75-A-PP		75-E-PP	
100-A-PP		100-E-PP	
1x1 1/4-A-PP		1x1 1/4-E-PP	
125-A-PP		125-E-PP	
150-A-PP		150-E-PP	
200-A-PP		200-E-PP	
300-A-PP		300-E-PP	
400-A-PP		Bar Coding Available	
Female Camlock x MPT Hvy D.Polypropylene		Male Camlock x MPT Hvy D.Polypropylene	
50-B-PP		50-F-PP	
75-B-PP		75-F-PP	
100-B-PP		100-F-PP	
1x1 1/4-B-PP		1x1 1/4-F-PP	
125-B-PP		125-F-PP	
150-B-PP		150-F-PP	
200-B-PP		200-F-PP	
300-B-PP		300-F-PP	
400-B-PP		400-F-PP	
Female Camlock x Hose Hvy D.Polypropylene		Female Camlock Dust Cap Hvy D.Polypropylene	
50-C-PP		50-DC-PP	
75-C-PP		75-DC-PP	
100-C-PP		100-DC-PP	
1x1 1/4-C-PP		125-DC-PP	
125-C-PP		150-DC-PP	
150-C-PP		200-DC-PP	
200-C-PP		300-DC-PP	
300-C-PP		400-DC-PP	
400-C-PP			


Female Camlock x FPT Hvy D.Polypropylene		Male Camlock Dust Plug Hvy D.Polypropylene			
50-D-PP		50-DP-PP			
75-D-PP		75-DP-PP			
100-D-PP		100-DP-PP			
1x1 1/4-D-PP		125-DP-PP			
125-D-PP		150-DP-PP			
150-D-PP		200-DP-PP			
200-D-PP		300-DP-PP			
300-D-PP		400-DP-PP			
400-D-PP					
Male Cam 90d x FPT & Hose Hvy D.PP		Female Cam 90d x FPT & Hose Hvy D.PP			
150-A-90L-PP		150-D-90L-PP			
200-A-90L-PP		200-D-90L-PP			
150-C-90L-PP		150-F-90L-PP			
200-C-90L-PP		200-F-90L-PP			

EZPull-CamGaurd PolyPropylene Camlock Plugs & Caps
Makes Pulling Hoses Easier, Safer & Gaurds your Camlock ends!
EasyPull-CamGaurd minimizes end replacement & downtime.
Great for Water, Oils, Fuels & Chemicals compatible with PP.










EZPULL-CamGaurd Male Plug		EZPULL-CamGaurd Female Cap	
EZCG-2P		EZCG-2C	
EZCG-3P		EZCG-3C	
EZCG-4P		EZCG-4C	
SafetyLock-Locks & protects camlocks!			
Safety-Lock-1			
Safety-lock-1.5			
Safety-lock-2			
Safety-lock-3			
Safety-lock-4			

Ductile Iron Camlocks 4" for Material Discharge hose and any other application requiring durability.

Ductile Iron Camlocks 4"			
400-A-DI			
400-C-DI			
400-D-DI			
400-E-DI			
400-F-DI			

Camlock Gaskets

BU=NBR Nitrile Buna Rubber(Standard) to 250F		BU=NBR Nitrile Buna rubber(Thick) for worn cams		
Handles Oil-Fuel-Water-Fertilizer etc.		Handles Oil-Fuel-Water-Fertilizer etc.		
50-G-BU		100-G-THK	 Buna N 5/16" Thick	
75-G-BU		150-G-THK		
100-G-BU		200-G-THK		
125-G-BU		300-G-THK		
150-G-BU		400-G-THK		
200-G-BU		EPR=EPDM Rubber: Light to Medium Chemical Applications. Fertilizers-Pesticides etc.		
250-G-BU		150-G-EPR		
300-G-BU		200-G-EPR		
400-G-BU		300-G-EPR		
500-G-BU		400-G-EPR		
600-G-BU		Temps to 300F deg		
800-G-BU		NE=Neoprene Rubber: See Chemical Resistance		
1000-G-BU		Extra Fuel Resistance: Temps to 250F		
1200-G-BU		100-G-NE		
VI= Viton Rubber Medium to High Concentration Chemical Applications! Up to 400F deg		150-G-NE		
75-G-VI		200-G-NE		
100-G-VI		250-G-NE		
125-G-VI		300-G-NE		
150-G-VI		400-G-NE		
200-G-VI		600-G-NE		
250-G-VI		WNE=White Food Grade Nitrile Grade Rubber. For Food & Beverage handling to 250F		
300-G-VI			100-G-WN	
400-G-VI		150-G-WN		
500-G-VI		200-G-WN		
600-G-VI		250-G-WN		
SIL=Silicone Rubber great for many Applications + Food & Beverage handling to 400F		300-G-WN		
100-G-SIL		400-G-WN		
125-G-SIL		500-G-WN		
150-G-SIL		600-G-WN		
200-G-SIL		TFVI=Teflon Accordian: Handles 99.5% + Food & Beverage handling to 500F		
250-G-SIL			100-G-TA	
300-G-SIL			150-G-TA	
400-G-SIL		200-G-TA		
TFVI=Teflon Viton Enveloped: Handles 99.5% + Food & Beverage handling to 400F		300-G-TA		
75-G-TFVI		TEV=Teflon Encapsulated Viton: Handles 99.5% + Food & Beverage handling to 200F		
100-G-TFVI		100-G-TEV		
150-G-TFVI		150-G-TEV		
200-G-TFVI		200-G-TEV		
300-G-TFVI		300-G-TEV		
400-G-TFVI				

			400-G-TEV		
Handle Ring and Pin for Camlocks					
Handle Ring and Pin SS304 I. Cast			Handle Ring and Pin Brass		
75-HRP-SP		Fits 1/2", 3/4"	75-HRP-BR		Fits 1/2", 3/4"
100-HRP-SP		Fits 1"	100-HRP-BR		Fits 1"
200-HRP-SP		Fits 1.25,1.5,2,2.5	200-HRP-BR		Fits 1.25,1.5,2,2.5
300-HRP-SP		Fits 3", 4", 5"	300-HRP-BR		Fits 3", 4", 5"
600-HRP-SP		Fits 6",8",10",12"	600-HRP-BR		Fits 6",8",10",12"

Working Pressures for Camlocks based on Material.

Metals: Aluminum-SS316-Brass-Ductile Iron WPSI @ 78deg F.

1/2" Through 2" 250WPSI

2 1/2" Through 4" 150WPSI

5" Through 6" 75WPSI

8" Through 12" 50WPSI

PolyPropylene with SS Handles WPSI @ 78deg F.

1/2" Through 2" 100WPSI

3" Through 4" 50WPSI

Note! These figures are for the camlock only and does not take into consideration how hose barbs on C & E are attached to the hose. Each method of attaching hose barb to hose varies the wpsi it can work at with the type of attachment Ex. clamps, crimp sleeves, crimp ferrules, size, hose type Etc.